CVCM6DC

speco technologies®

Mirror Finish Indoor Color Dome Camera

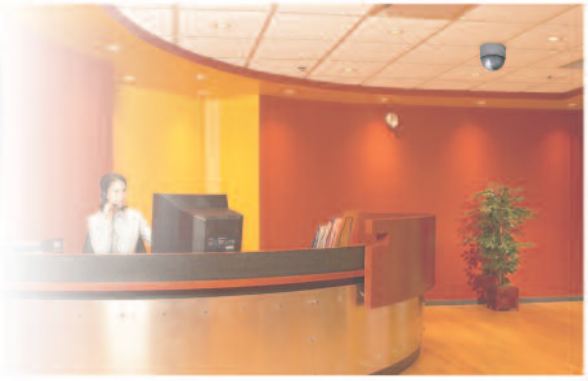

CVCM6DC

Mirror Finish Dome looks good in building lobbies, hotels, restaurants and other environments that demand aesthetically pleasing equipment.

- Camera angle is easily adjustable
- Wall or ceiling mountable using internal 3-way camera bracket
- Removable dome liner

Specifications

Image Sensor	1/3" Sony Super HAD* CCD
Number of Pixels	510 H x 492 V
Scanning System	NTSC 2:1 interlace
Horizontal Resolution	420 TV lines
Minimum Illumination	0.2 lux
Lens	3.6mm
Signal to Noise Ratio	>50dB
Gain Control	Auto
BLC	Auto
Synchronization	Internal
Electronic Shutter	1/60 – 1/100,000 sec.
Gamma Correction	.45
White Balance	Auto (2500° - 9500° K)
Video Output	1V P-P (into 75)
Dimensions	4 3/8" diameter x 3 5/8" high
Voltage Requirement	12V DC regulated - *Suggested: Speco's Model # PSW5*
Current Draw	100 mA DC
Temperature	-14°F - +122°F operating -22° F - +158°F storage
Relative Humidity	0-95%

** Super-HAD is a trademark of The Sony Corporation*

Specifications subject to change

For more information contact us at:
Speco Technologies 200 New Highway, Amityville, NY 11701 **Web: www.specotech.com**
Toll Free: 1-800-645-5516 **In Metro NY:** 631-957-8700 **Fax:** 631-957-9142 or 631-957-3880